


Antenna Product Specifications

SLU0380DS6A

0.3m Ultra High Performance Low Profile Antenna, single-polarized,
71.0~86.0 GHz

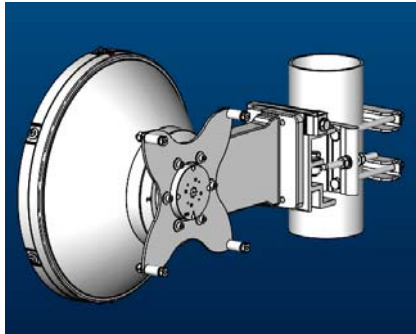

CHARACTERISTIC

General Specifications

| | |
|-----------------------------|---|
| Antenna Type | Ultra High Performance Low Profile Antenna, Single-Polarized Antenna |
| Diameter, nominal | 0.3m / 1ft |
| Polarization | Single |
| Reflector Construction | One-piece reflector |
| Antenna Color | Cool Gray(1C) |
| Radome Color | RAL 7047 |
| Radome Material Description | ABS |

Electrical Specifications

| | |
|----------------------------------|--|
| Frequency | 71 ÷ 86 GHz |
| Gain, Top | 47.0 dBi |
| Gain, Mid | 46.0 dBi |
| Gain, Low | 45.0 dBi |
| Front-to-Back Ratio | 62 dB |
| Cross Polar Discrimination (XPD) | 27 dB |
| Beamwidth | 0.7° |
| VSWR | 1.5 |
| Return Loss | 14 dB |
| Regulatory Compliance | ETSI EN 302 217 Range 7 Class 3 US FCC Part 101.115 |


Mechanical Specification

| | |
|-------------------------------|---|
| Wind Velocity Operational | 200 km/h |
| Wind Velocity Survival Rating | 252km/h |
| Fine Azimuth Adjustment | Coarse 360° Fine $\pm 15^\circ$ |
| Fine Elevation Adjustment | Coarse $\pm 25^\circ$ Fine $\pm 15^\circ$ |
| Mounting Pipe Diameter | $\Phi 51 \sim \Phi 114$ mm |
| Ice-load | 25.4 mm |
| Operational Temperature | -45~+75 °C |
| Side Struts, Included | 0 |
| Net Weight | 8 kg |


Wind Forces at Wind Velocity Survival Rating

| | |
|----------------------------|---------|
| Axial Force(FA) | 430 N |
| Side Force(FS) | 235 N |
| Twisting Moment(MT) | 180 N•m |
| Zcg without Ice | -3 mm |
| Zcg with 1"(25.4mm) Ice | 19 mm |
| Weight with 1"(25.4mm) Ice | 10.3 kg |

Wind Forces at Wind Velocity Survival Rating Image

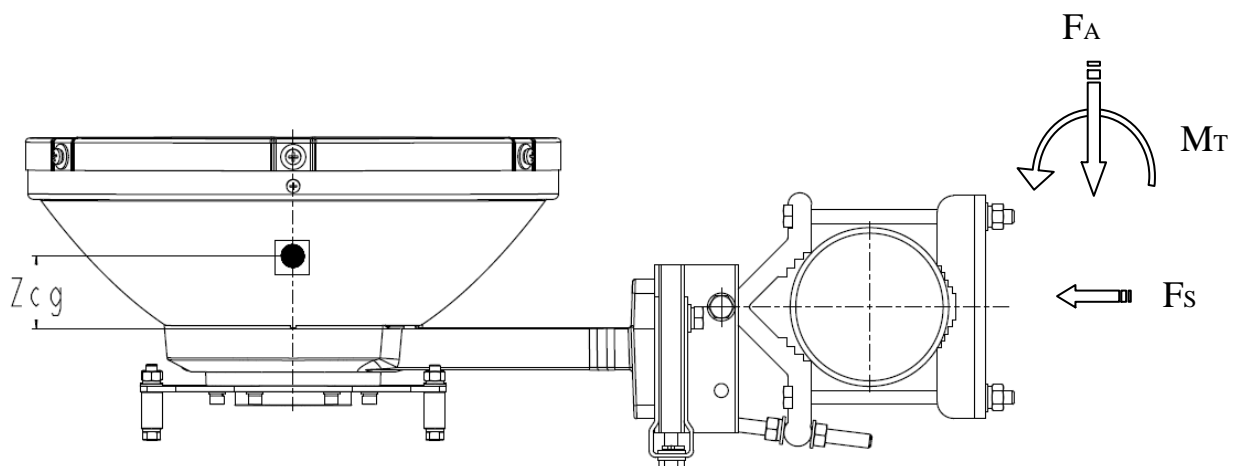


Antenna Dimensions and Mounting Information

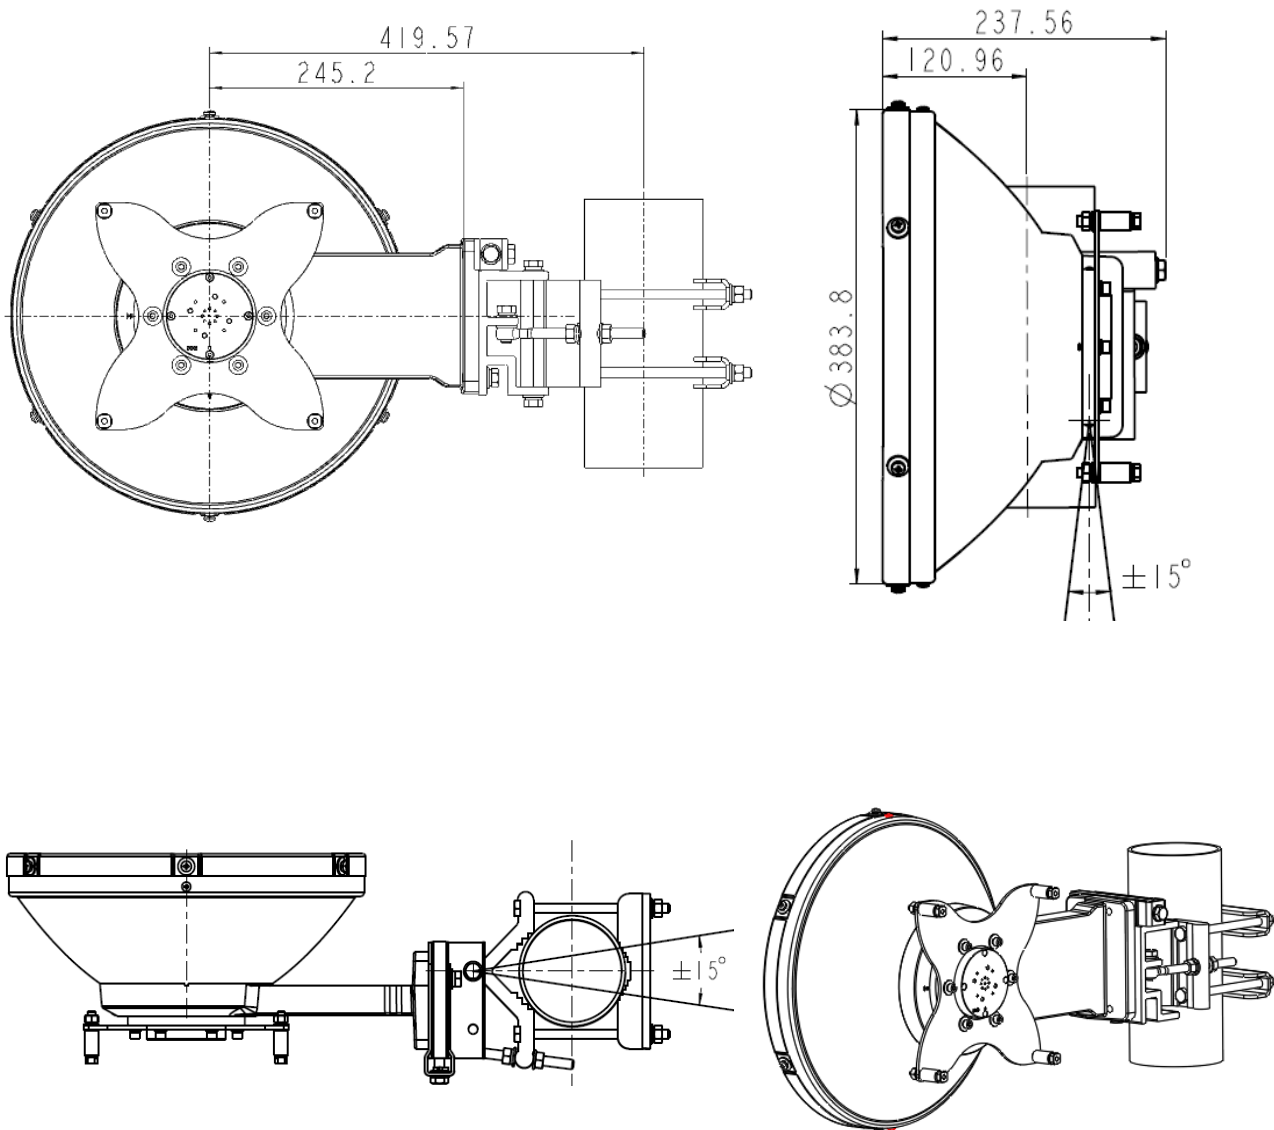

Mechanical Torque

| | | |
|-------------------|---------|--------|
| Diameter of screw | 4 mm | 10 mm |
| Torque Value | 0.9 N•m | 22 N•m |

Radiation Pattern Envelope Reference (RPE)

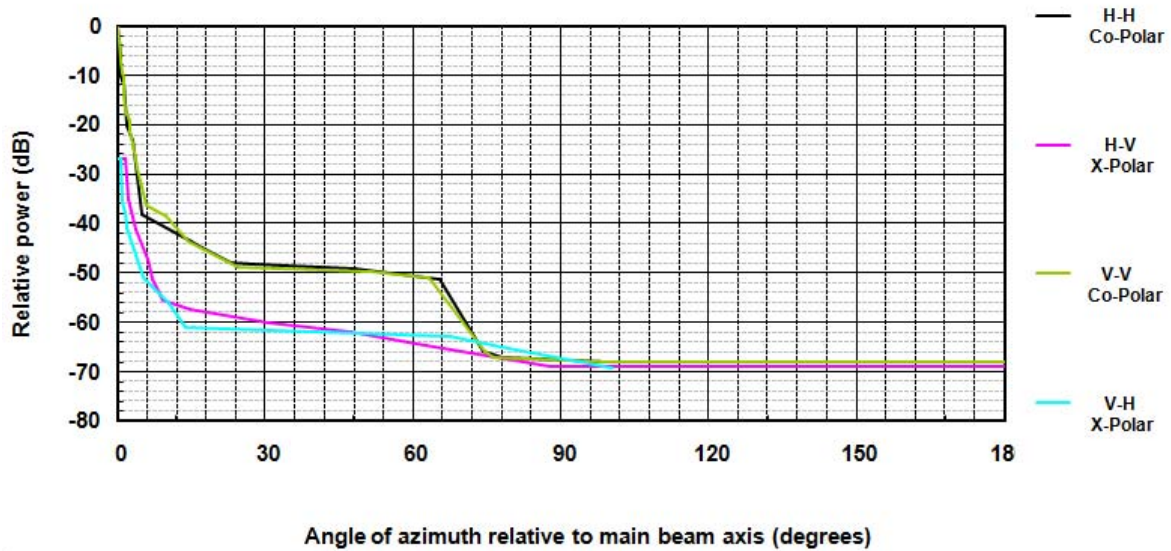

| H-H | | H-V | | V-V | | V-H | |
|-------|--------|-------|--------|-------|--------|--------|--------|
| Angle | dB | Angle | dB | Angle | dB | Angle | dB |
| 0 | 0 | 0 | -27 | 0 | 0 | 0 | -27 |
| 0.2 | -0.73 | 1.5 | -27 | 0.2 | -0.68 | 0.7 | -27 |
| 0.4 | -3.32 | 2.2 | -35.15 | 0.4 | -3.27 | 0.95 | -35.69 |
| 0.6 | -7.4 | 3.6 | -41.11 | 0.6 | -7.48 | 1.6 | -37.81 |
| 0.8 | -10.05 | 6.05 | -48.46 | 1 | -9.58 | 1.95 | -41 |
| 1 | -11.2 | 7 | -51.3 | 1.2 | -10.42 | 5.3 | -51.04 |
| 1.2 | -11.81 | 9.35 | -55.46 | 1.4 | -13.28 | 10.3 | -56.27 |
| 2 | -20.23 | 14.75 | -57.29 | 1.6 | -17.58 | 13.8 | -60.96 |
| 3 | -23.21 | 30.85 | -60.11 | 2.2 | -18.5 | 67.6 | -62.92 |
| 4.8 | -38.22 | 47.3 | -62.04 | 2.4 | -19.93 | 79.4 | -65.36 |
| 13 | -47.88 | 62.5 | -64.77 | 2.6 | -22.56 | 100.45 | -69.37 |
| 17 | -48.88 | 88 | -68.96 | 3 | -24.83 | 180 | -69.51 |
| 22.9 | -51.05 | 180 | -69.02 | 4.05 | -30.62 | | |
| 27.85 | -51.39 | | | 5.6 | -38.18 | | |
| 48.35 | -51.53 | | | 9.15 | -39.36 | | |
| 55.6 | -52 | | | 13.30 | -46.6 | | |
| 65.25 | -52.14 | | | 24.55 | -52.35 | | |
| 74.15 | -66 | | | 51.55 | -52.84 | | |
| 78.05 | -67 | | | 63.25 | -52.99 | | |

| | | | |
|-----|-----|-------|-----|
| 100 | -68 | 74.45 | -66 |
| | | 180 | -68 |

RoHS Compliance

This product and its packaging are compliant to the DIRECTIVE 2002/95/EC of the EUROPEAN PARLIAMENT and of the COUNCIL of 27 January 2003 (RoHS) on the restriction of the use of hazardous substances as defined on RoHS Directive.

Footnotes

| | |
|---|---|
| Axial Force (FA) | Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe. |
| Cross Polarization Discrimination (XPD) | The stated unit is dB. It refers to the difference of levels between co-polar and cross-polar within range of 3dB BW. |
| Front to Back Ratio | It refers to the ratio between peak level and the lowest back lobe at $180^{\circ} \pm 60^{\circ}$; The F/B Ratio of existing products are unable to exceed 2dB as against stated values unless other specific declarations. |
| Gain, Mid Band | It denotes the gain of centre frequency in operated frequency band. The average value of stated three frequencies at mid-band as well as bottom and top frequency bands is gain of antenna. |
| Half-Power BW | Denote the nominal total width of main beam at the -3dB points. |
| Operating Frequency Band | Bands correspond with ITU-R recommendations or common allocations used throughout the world. Other ranges can be accommodated on. |
| Packing | Standard packing is suitable for export. Antennas are shipped as standard in totally recyclable material. |
| Radiation Pattern Envelope | Radiation patterns determine an antenna's ability |

| | |
|-------------------------------|---|
| Reference (RPE) | to discriminate against unwanted signals under conditions of radio congestion. Radiation patterns are dependent on antenna series, size, and frequency. |
| Return Loss | The figure that indicates the proportion of radio waves incident upon the antenna that are rejected as a ratio of those that are accepted. |
| Side Force (FS) | Maximum axial forces exerted on support structures by side struts as a result of a 240 km/h wind from the most critical direction and extreme angle permitted. The forces are a component of, not in addition to, the maximum forces specified above. |
| Twisting Moment (MT) | Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe. |
| VSWR | Refer to the maximum Voltage Standing Wave Ration in frequency band of operation. |
| Wind Velocity Operational | The antenna axis deflection is less than one third of the half power beam width at the highest frequency which occurs. |
| Wind Velocity Survival Rating | The antenna sub-system will survive the specified survival wind speed without any permanent deformation or change of shape. |

Part Numbers List

| P/N | Flanges/WG Dim | Description | Integration Kit |
|-------------------|----------------|--------------------|-----------------|
| SLU0380DS6A-S-01M | R740 | 0.3M 80GHz SP INT. | / |

